



### MINI REGRESSED BAFFLE TRIM

Mini Die Cast Trim w/ Regressed Black Baffle

Halogen MR11 12 volts 20 watts max.



Item #

**MS5000** White Trim w/ Black Baffle

**MS5001** Black Trim w/ Black Baffle (shown)

**MS5003** Chrome Trim w/ Black Baffle

- Includes housing for remote transformer
- Relamps from the bottom
- Ceiling cut-out: 2.31"
- Above ceiling clearance: 3.00"

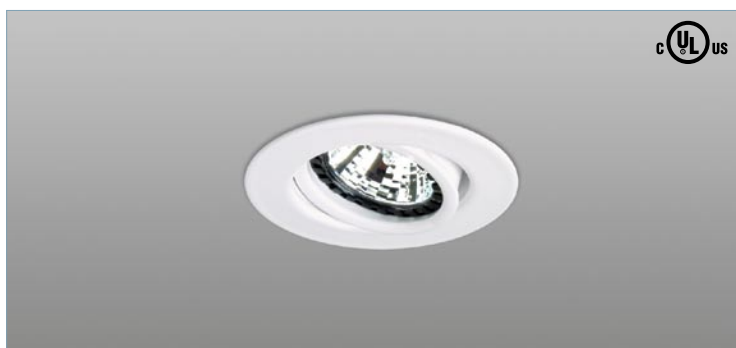

### MINI ADJUSTABLE GIMBAL TRIM

Mini Die Cast Trim w/ Adjustable Gimbal - 25° Adjustability


Halogen MR11 12 volts 20 watts max.

Item #

**MS5004** White Trim (shown)

**MS5005** Black Trim

- Includes housing for remote transformer
- Relamps from the bottom
- Ceiling cut-out: 2.31"
- Above ceiling clearance: 3.00"



### MINI ADJUSTABLE EYEBALL TRIM

Mini Die Cast Trim w/ Adjustable Eyeball - 45° Adjustability


Halogen MR11 12 volts 20 watts max.

Item #

**MS5008** White Trim (shown)

**MS5009** Black Trim

- Includes housing for remote transformer
- Relamps from the bottom
- Ceiling cut-out: 2.50"
- Above ceiling clearance: 3.00"



### MINI RECESSED OR SURFACE

Mini Combination Fixture for Surface or Recessed Mounting

Halogen G4 12 volts 20 watts max.


Item #

**MMS6000** White Fixture (shown)

**MMS6001** Black Fixture

**MMS6003** Chrome Fixture

- 20W halogen lamp included
- Can be recessed or surface mounted
- Internal aluminum reflector
- 36" socket leads





L= 2.81" W= 1.75" H= 1.18"


## 60 WATT ELECTRONIC TRANSFORMER

### Item #

**RT60** 120V/12V 60 Watts - Class 2

### Specs

- Primary volts: 120V 60Hz
- Secondary volts: 11.5VAC
- Input: 0.5A
- Operating frequency: >20KHz
- Output: 60 watts max.
- Dimmable
- Internal thermal cut-off
- Fuse: 0.5A
- For use with 12 volt halogen lamps only

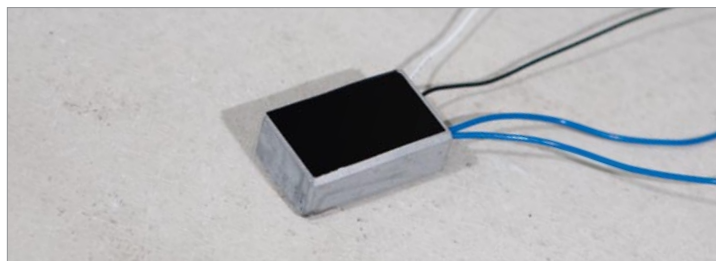

L= 2.06" W= 1.25" H= 0.75"

## 75 WATT ELECTRONIC TRANSFORMER

### Item #

**RT75L** 120V/12V 71 watts

### Specs

- Primary volts: 120V 60Hz
- Secondary volts: 11.5VAC
- Input: 0.625A
- Operating frequency: >20KHz
- Output: 71 watts max.
- Dimmable
- Internal thermal cut-off
- For use with 12 volt halogen lamps only



L= 3.13" W= 1.30" H= 0.88"


## 105 WATT ELECTRONIC TRANSFORMER

### Item #

**RT105** 120V/12V 105 Watts

### Specs

- Primary volts: 120V 60Hz
- Secondary volts: 11.5VAC
- Input: 0.875A
- Operating frequency: >20KHz
- Output: 105 watts max.
- Dimmable
- Internal thermal cut-off
- For use with 12 volt halogen lamps only

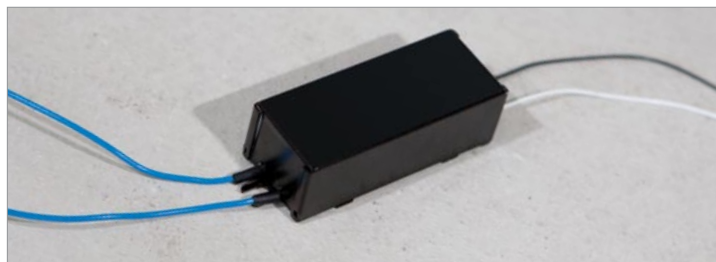

L= 3.18" W= 1.38" H= 1.13"

## 150 WATT ELECTRONIC TRANSFORMER

### Item #

**RT150** 120V/12V 150 Watts

### Specs

- Primary volts: 120V 60Hz
- Secondary volts: 11.5VAC
- Input: 1.25A
- Operating frequency: >20KHz
- Output: 150 watts max.
- Dimmable
- Internal thermal cut-off
- For use with 12 volt halogen lamps only



L= 9.38" W= 1.63" H= 1.38"

## 300 WATT ELECTRONIC TRANSFORMER

### Item #

**RT300L** 120V/12V 300 Watts w/ metal enclosure  
Fuse on primary

### Specs

- Primary volts: 120V 60Hz
- Secondary volts: 11.5VAC
- Input: 2.50A
- Operating frequency: >20KHz
- Output: 300 watts max.
- Dimmable
- Internal thermal cut-off
- For use with 12 volt halogen lamps only